


## EcoWorx Performance Broadloom™



<b>backing system</b>	<b>EcoWorx Performance Broadloom</b>
<b>backing description</b>	100% thermoplastic polyolefin compound with a high performance precoat and a reinforcing layer
<b>backing process</b>	3-step process <ol style="list-style-type: none"> <li>1. High performance precoat for maximum tuft bind</li> <li>2. Thermoplastic laminate for superior delamination strength</li> <li>3. Fleece outer layer for stability</li> </ol>
<b>primary</b>	Synthetic
<b>stabilizer</b>	Fleece
<b>weight</b>	40 oz/yd <sup>2</sup> (average)
<b>width</b>	12 feet
<b>testing</b>	<ul style="list-style-type: none"> <li>• Radiant Panel Fire – Class 1 (based on pile construction)</li> <li>• NBS Smoke &lt; 450 (based on pile construction)</li> <li>• TVOCs &lt; 500 micrograms/sqm/hr</li> </ul>
<b>installation</b>	Adhesives: Full spread - Shaw 3500 or Shaw 3600 (with Florsept Antimicrobial) Seam Sealer Required: Shaw 8300 (providing a moisture impervious seam) or Shaw 4000.
<b>performance</b>	<ul style="list-style-type: none"> <li>• Superior performance to traditional broadloom backing</li> <li>• No delamination</li> <li>• No edge ravel</li> <li>• Complete moisture barrier – passes 10,000 impact test</li> </ul>

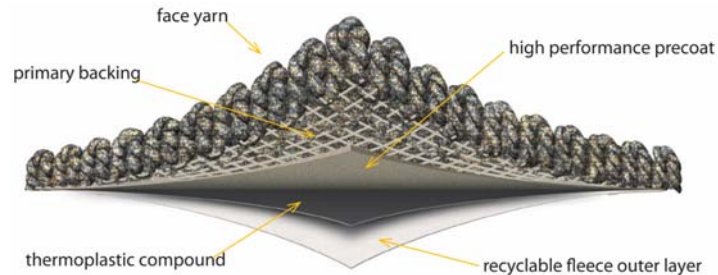

**environmental**

- Cradle to Cradle technology
- EG: environmental guarantee
- PVC free
- Lighter in weight than traditional performance broadloom backings
- Low VOC's meeting CRI Green Label and Green Label plus requirement

**warranty**

Lifetime Commercial

**shaw information**

Call 1.800.441.7429 for personal assistance